

nola®



## Akalla Shading Structure and Shelter

### Design Nola


Akalla is a shading structure with oiled oak beams supported by black steel posts. A version with a plywood parts is available to provide support for a roof of corrugated metal, plastic or sedum. The system can easily be expanded and supplemented with additional sections. While Akalla provides an ideal spot for enjoying a garden or outdoor courtyard, it can also be used for storing bicycles and recycling bins. For Akalla with a flat pergola roof, there are both straight and angled start and extension sections, for more information see system description. Akalla has been approved in the [Svanens Husportal](#) (Sioux oak) and is environmentally assessed via [Byggvarubedömningen](#).

#### CERTIFICATION

Produkt listad i  
Svanens Husportal



**SundaHus**

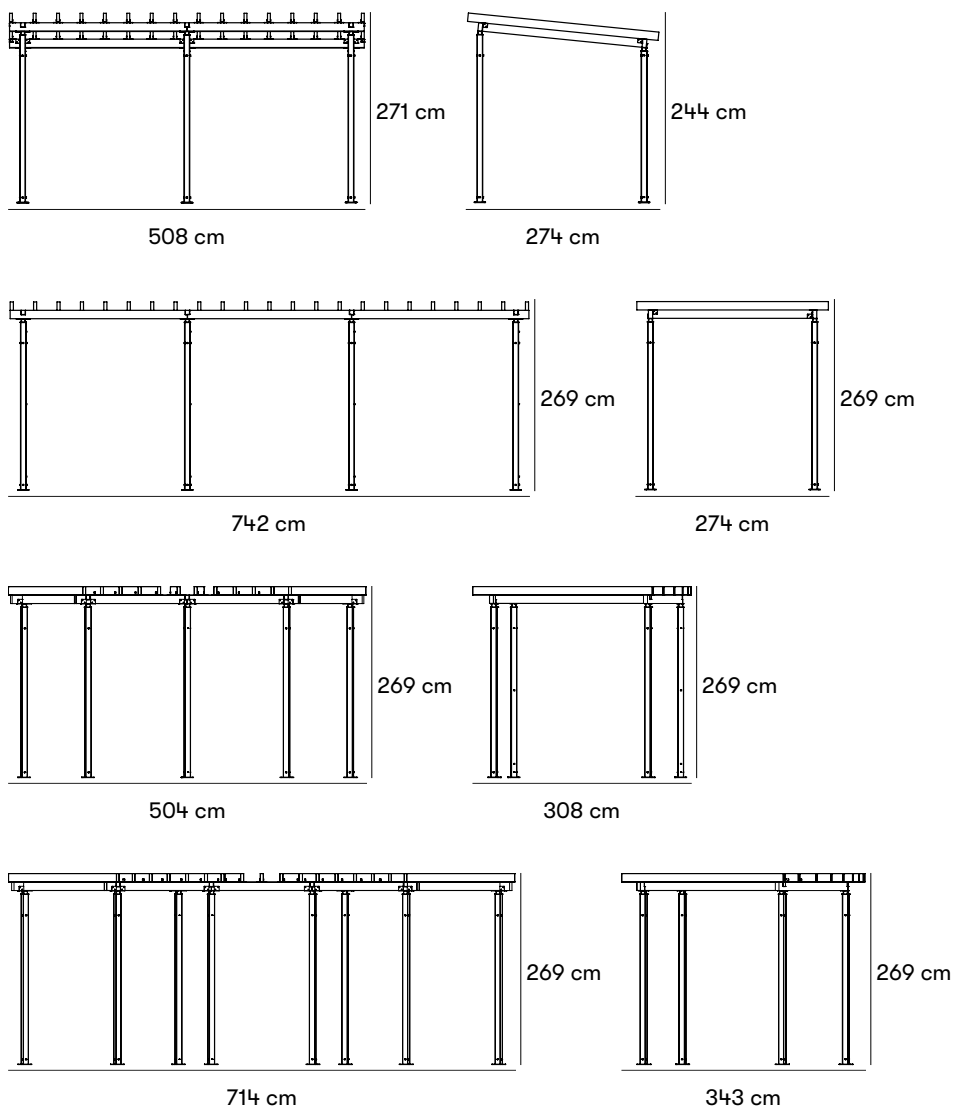

#### Dimensions and weight

##### Akalla Straight Start section Angled roof

Length: 508 cm

Width: 274 cm

Height: Front: 271 cm. Back: 244 cm

##### Akalla Straight Start- and Extension section Angled roof

Length: 742 cm

Width: 274 cm

Height: Front: 271 cm. Back: 244 cm

##### Akalla Straight Start section Flat roof

Length: 508 cm

Width: 274 cm

Height: 269 cm

##### Akalla Straight Start- and Extension section Flat roof

Length: 742 cm

Width: 274 cm

Height: 269 cm

**Akalla Angled Start section Flat roof**

Length: 504 cm

Width: 308 cm

Height: 269 cm

**Akalla Angled Start and Extension Flat roof**

Length: 714 cm

Width: 343 cm

Height: 269 cm

**Product numbers and combinations**

Ö80-10 Akalla Pergola Straight Start section with angled pergola roof.

Ö80-11 Akalla Pergola Straight Extension section with angled pergola roof.

Ö80-10RT Akalla Pergola Straight Start section with flat pergola roof.

Ö80-11RT Akalla Pergola Straight Extension section with flat pergola roof.

Ö80-13 Trellis section with wooden slats in oiled oak for Akalla Straight Pergola.

Ö80-12RT Akalla Pergola Rhombus-shaped Extension section with flat pergola roof.

Ö80-14RT Akalla Pergola Angled Start section with flat pergola roof.

Ö80-15RT Akalla Pergola Angled Extension section with flat pergola roof.

**Append to product number**

**WOOD AND FINISH**

EK for oiled oak.

SIOO for sioo:x treatment oak.

RAL 9005

C for another color other than standard, starting cost is added.

**METAL SURFACE FINISH**

RAL 9005

C for another color other than standard, starting cost is added.

**VARIANTS**

RT for Akalla with flat pergola roof.

For more information on how Akalla is built out with straight and angled sections, see system description.

**Standard colours**



RAL 9005

**Materials and surface treatments**

**Pine**

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

### **Oak**

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

### **Wood oil**

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

### **SiOO:X treatment**

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

### **Water-based glaze**

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

### **Steel**

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## **Assembly and placement**

Poles, trellises, over-lignite and pergola bars are supplied separately.

Poles are measured and anchored to the ground.

Trellises are mounted against the posts and the associated screw.

The uppers are screwed against the posts with the screws and angular fittings attached.

The pergola booms are screwed against the uppers using the screws and angular fittings supplied.

See installation instructions for more information.

Mounted against foundation. See assembly instructions for more information.

## Maintenance

### Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

### SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). Directly after a product has been installed, it should be treated once more with Sioo:x Premium Surface Protection Altan for best durability. After that, every 12 months. The surface protection forms a wear surface, which means that products that are exposed to severe mechanical wear may need to be treated more often than every ten years. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website [www.sioox.se](http://www.sioox.se).

### Water-based glazed pine

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

### Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

## Versions

Akalla is a pergola system that can be expanded. The start section has the measurements above. There are extension kits for longer variants. Body sections and trellis sections are ordered separately. Standard steel color, black RAL 9005

## Character

Functional pergola system with trellis sections. Spacious but at the same time simple in its steel construction with wooden details in oiled oak.

## Designers

---

## Nola

---



*The Akalla pergola and Tüben furniture group shown in one of Rosendal's outdoor courtyards. Photo: Christoffer Skogsmo.*



*Akalla pergola in powder-coated steel and oak. Photo: Jann Lipka.*

