

nola®



Leksand Armchair

Design Tema

Leksand is renowned for its history of traditional woodworking and timber craftsmanship. The classic Leksand wooden chair dates back to the early 1800s, and provided the inspiration for the armchair, bench and backed bench in this group. The furniture was designed to remain outdoors year-round and meets requirements for accessibility, comfort and durable design. Each product is crafted from FSC-certified cumaro or oak, and fitted with sand-cast aluminium components.

Leksand furniture group has been approved in [Svanens Husportal](#) (oiled oak and cumaru) and is assessed via [Bygghusbedömningen](#) and [SundaHus](#) when choosing oiled oak.

Can be treated with Protega Novatherm fire protection, which is a waterborne fire protection paint, for products which, for example, will be placed in connection with escape routes and entrances.

CERTIFICATION


Produkt listad i
Svanens Husportal



SundaHus



Can be treated with fire protection

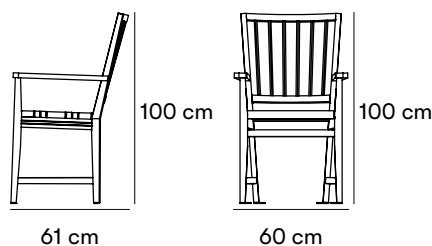

Dimensions and weight

Width: 60 cm
Height: 100 cm
Sitting height: 49 cm
Depth: 61 cm
Vikt: 30 kg

Product numbers and combinations

U16-10 Leksand armchair
B11-06 Startup cost for powder coating steel in a color other than standard.
Choose a RAL colour.

Append to product number

WOOD AND FINISH

CU for cumaru.
SIOO for sioo:x treatment oak.
EK for oiled oak.

METAL SURFACE FINISH

C for any color other than standard, at additional cost.

VARIANTS

Can be treated with fire protection, at additional cost.
For fire protection treatment contact Nola.

INSTALLATION TYPE

N for surface mount.

Standard colours



RAL 7024

Materials and surface treatments

Untreated Cumaru wood or oiled red oak. Powder coated in sand cast aluminum in Gray, RAL 7024.
Optional color, starting cost is added.

Cumaru

Cumaru is sometimes called Brazilian Teak and is a hard and durable type of wood. The wood changes in a red/brown shade and does not need surface treatment thanks to its natural properties. Over the years Cumaru ages in a beautiful silver gray tone.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Recycled sand cast aluminium

Aluminium recycled from scrap, hand cast in sand moulds. The energy consumption when producing recycled aluminium is about 5% of that used when producing virgin aluminium.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Free standing / Ground mounted.

Maintenance

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). Directly after a product has been installed, it should be treated once more with Sioo:x Premium Surface Protection Altan for best durability. After that, every 12 months. The surface protection forms a wear surface, which means that products that are exposed to severe mechanical wear may need to be treated more often than every ten years. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

Cumaru

Cumaru shifts in a reddish shade and does not need any maintenance thanks to its natural properties. Over the years Cumaru ages into a beautiful silver gray tone.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Versions

Available as an armchair, backed bench and bench.

Character

Elegant and generous armchair.

Designers

Tema



*Inspirationen har hämtats från den klassiska trästolen som tillverkades i Leksand under tidigt 1800-tal.
Bild: PE Teknik & Arkitektur*



Leksand, fästölj, framtagen i samarbete med Temagruppen. Foton från Z-torget i Leksand kommun.



Med en lite högre sitt höjd (49 cm) är stolen tillgänglighetsanpassad. Armstöden är förlängda och greppvänliga.



Leksand, fästölj bredvid ett runt Parco-bord.