# nola



## **Pylon Bench**


## Design Kristoffer Fagerström & Marcus Abrahamsson

Inspired by tall pylons supporting power lines, the base of the bench is formed by twin uprights that balance the seat between them. The seat is created by two layers of pine beams compressed into a solid length. Pylon is a perfect complement to cutting-edge interiors and contemporary outdoor spaces, or any setting where art and design take centre stage. A one-seater version is also available.

Can be treated with Protega Novatherm fire protection, which is a waterborne fire protection paint, for products which, for example, will be placed in connection with escape routes and entrances.



Can be treated with fire protection

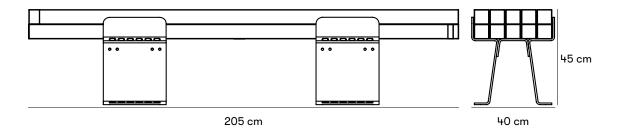

Dimensions and weight

Length: 205 cm alternativt 48 cm

Width: 40 cm Height: 45 cm

Individual dimensions:

The support posts are in 8 mm bent sheet steel which are hot-dip galvanized and powder-coated white RAL 9010.

The seat is made in glued stained pine, or alternatively, oiled ipé wood 70 mm x 70 mm.

Product numbers and combinations

**U21-90** PYLON bench, varnished and lacquered, multi-coloured surface with white frame, indoor use

U21-90IPE PYLON bench, oiled ipé with white frame

**U21-91** PYLON footstool, varnished and lacquered, multi-coloured surface with white frame, indoor use

U21-91IPE PYLON footstool, oiled ipé with white frame

Append to product number

WOOD AND FINISH

IPE for ipé.

**VARIANTS** 

Can be treated with fire protection, at additional cost.

For fire protection treatment contact Nola.

INSTALLATION TYPE

N for surface mount.

Standard colours

RAL 9010

NCS S 0770-Y30R (orange)
NCS S 1050-R30B (magenta)

NCS S 1050-B10G (blå)
NCS S 1060-G (grön)

Materials and surface treatments

Glazed Glulam.

#### lpé

Our FCS-marked lpé is an extremely hard wood thanks to its high density. The hardness gives remarkably high physical durability and resistant to the effects of sun, rain, and other weather over decades.

#### Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

## Assembly and placement

### Freestanding

Freestanding product that is placed directly on the ground.

#### Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Delivered fully assembled.

#### Maintenance

#### lpé

lpé has a durability of up to 40 years if it is not treated with more than normal care. With regular oiling once a season with wood oil, the durability is up to 100 years. Untreated lpé will turn from reddish brown to a more silver gray color over time. If you want to keep the brown color, it must be treated and maintained with wood oil.

Read more in our general maintenance advice at nola.se/en/care-and-maintenance

## Versions

Available as a bench or a seat and in a choice of woods. Note that the indoor version is not suitable for outdoor use.

Uncoloured oiled ipé wood is used in the outdoor versions.

### Character

Pylon is based on a traditional bench shape, which has been dramatically transformed into a striking contemporary design.

## Designers

## Kristoffer Fagerström



## Marcus Abrahamsson



