

nola®




Wembley Par Bench

Design Thomas Bernstrand

This impressive tiered seating system creates a space-saving seating arrangement that is as striking as it is practical. Like stadium seats, Wembley combines the staircase and seating in a single expression. The bench-like seating arcs into a sleek curve that gives spectators vantage points in several directions. Whether seating spectators, shoppers, or students during a break, Wembley provides uniquely multi-level seating that can be enjoyed by people in many walks of life.

CERTIFICATION

Produkt listad i
Svanens Husportal  BYGGVARU
BEDÖMNINGEN

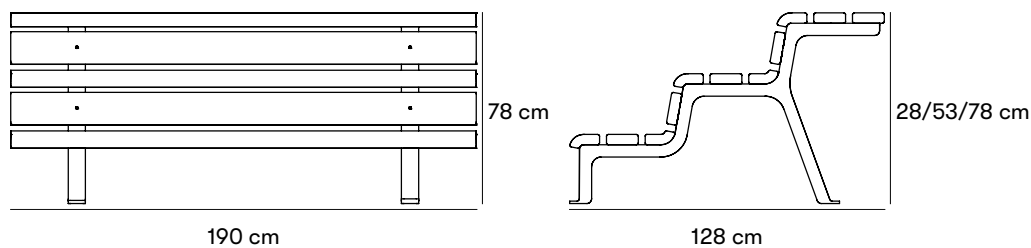

Dimensions and weight

Length: 190 cm
Width: 128 cm
Height: 78 cm
Sitting depth: 40 cm
Vikt: 80 kg

Step heights: Bottom step: 28 cm Middle step: 53 cm Top step: 78 cm

Individual dimensions

Metal parts in frame: 50 mm x 70 mm

Wood components: 42 mm x 130 mm (width)

Product numbers and combinations

U22-35 Wembley Park bench, oiled oak with frame in recycled cast aluminum

U22-36 Wembley Park bench, varnished pine with frame in recycled cast aluminum

Append to product number

WOOD AND FINISH

EK for oiled oak.

Följande standardalternativ finns i täcklaserad furu:

R för täcklaserad furu rödbrun, NCS S 4550-Y80R.

LG för täcklaserad furu ljusgrön, NCS S 6010-G10Y.

G för täcklaserad furu Stockholmsgrön, NCS S 8010-G10Y.





GRÅ för täcklaserad furu ljusgrå, NCS S 5502-B.

C för valfri kulör annan än standard, startkostnad tillkommer.

INSTALLATION TYPE

N for surface mount.

Standard colours

	NCS S 4550-Y80R (Röd)
	NCS S 6010-G10Y (Grön)
	NCS S 8010-G10Y (Grön)
	NCS S 5502-B

Materials and surface treatments

Recycled sand cast aluminium

Aluminium recycled from scrap, hand cast in sand moulds. The energy consumption when producing recycled aluminium is about 5% of that used when producing virgin aluminium.

Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

Teak - FSC-certified

FSC-labeled teak is exceptionally durable in an outdoor environment. Teak has a high content of silicon and tannic acids, which makes it quite expensive to process. If you want to keep the reddish-brown luster, you should oil the wood several times during a season, otherwise it turns gray quickly.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Assembled.

Maintenance

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

Water-based glazed pine

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

Sand cast aluminium

Maintenance on aluminium is not normally needed, but make sure to wash and keep the material clean. Untreated aluminium develops a matte surface over time.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Oiled oak, oiled teak or alkyd oil enamel on pine.

Character

Wembley Park's tiered benches form a unique space-saving seating arrangement.

Designers**Thomas Bernstrand**

Designer Thomas Bernstrand, who owns his own design studio in Stockholm, has participated in a large number of design and art exhibitions around the world such as MoMA in New York, Colette in Paris, Biennale Design Saint-Etienne and others.

Bernstrand has received several awards for his work, including Excellent Swedish Form and Winner of the Good Design Award 2012 for Nolastolen Share. For Nola, Bernstrand has designed a large number of products and furniture series and participated in a number of special projects over the years.



