

# nola®



## Access Park Bench

### Design Veryday

The Access park bench is ergonomic design at its best. The bench is designed to accommodate a wide range of body shapes and different levels of mobility. The seat and backrest are higher than standard heights, and incline slightly forward to enable those seated to rise more easily. The bench is fitted with reinforced armrests that provide extra support when sitting down and standing up.

#### CERTIFICATION


Produkt listad i  
Svanens Husportal



#### FEATURES



Designed for accessibility

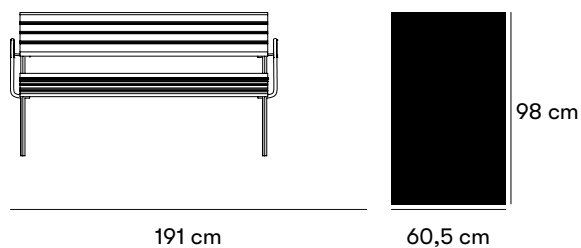

#### Dimensions and weight

Length: 191 cm  
 Width: 60,5 cm  
 Height: 98 cm  
 Armrest height: 82 cm  
 Sitting height: 53 cm  
 Depth: 60,5 cm  
 Weight 36 kg

#### Individual dimensions

Steel tube: 25 x 3 mm  
 Underlay in 4 mm sheet steel  
 Wood components: 25 x 1800 mm

#### Product numbers and combinations

U11-35 Access Backed bench  
 U11-35-2 Replacement kit, wood

#### Append to product number

##### WOOD AND FINISH

E for oiled oak.  
 MH for oiled mahogany.




##### METAL SURFACE FINISH

C for any color other than standard, initial cost is added.

##### INSTALLATION TYPE

N for surface mount.

#### Standard colours

 RAL 7016  
 Oiled oak  
 Oiled mahogany

#### Materials and surface treatments

##### Mahogany - FSC-certified

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

### **Oak**

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

### **Steel**

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### **Wood oil**

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## **Assembly and placement**

### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

## **Maintenance**

### **Oiled oak**

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

### **Oiled mahogany**

Oiled mahogany should be oiled two times a year.

### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## **Versions**

Available in FSC-certified sipo mahogany, oiled teak, oiled oak or painted pine.

## **Character**

An outstanding ergonomic bench designed to give the user an independent means of sitting down and standing up.

## Designers

---

## Veryday

---



