


nola®



## Angle Bench

Design Synnöve Mork

Angle Bench is part of the Furniture Series together with Planters in three different sizes and volumes, as well as a Trellis that can easily be placed in the planters. The bench is sized to be furnished together with the small planters but can also be combined with the other sizes. Angle is like an architectural puzzle with almost unlimited possibilities. Together, the parts can create the most imaginative formations.

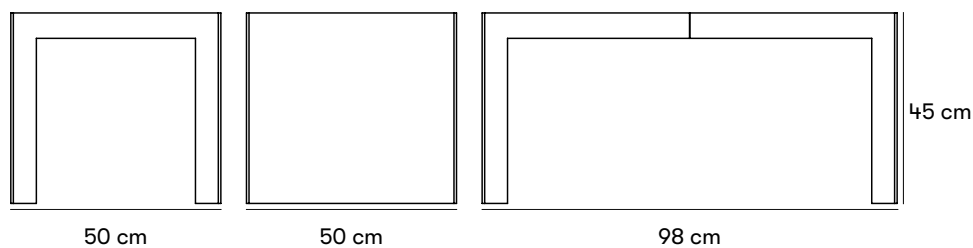

#### Dimensions and weight

Length: 98 cm  
Width: 50 cm  
Height: 45 cm

#### Product numbers and combinations

Ö16-79Ö Angle Bench with open ends  
Ö16-79S Angle Bench with closed ends

#### Append to product number

##### WOOD AND FINISH

J for jatoba.  
LIN for linax impregnated pine.













##### METAL SURFACE FINISH

C for any color other than standard, starting cost is added.

##### INSTALLATION TYPE

N for surface mount.

#### Standard colours

|   |                        |
|---|------------------------|
|  | RAL 6033               |
|  | RAL 6025               |
|  | RAL 6028               |
|  | RAL 3013               |
|  | RAL 5020               |
|  | RAL 2002               |
|  | RAL 5021               |
|  | RAL 7044               |
|  | RAL 7048               |
|  | RAL 1000               |
|  | Jatoba                 |
|  | Linax impregnated pine |

#### Materials and surface treatments

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

#### **Zinc powder primer**

It's a thermosetting epoxy powder coating primer that can be applied on several type of metal substrates such as aluminium, steel or galvanised steel. This primer has a robust curing window, allowing excellent inter coat adhesion in direct fired ovens and gives very good edge coverage and superior corrosion protection.

#### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

#### **Pine**

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

#### **Jatoba - FSC-certified**

Our FSC-labeled Jatoba is an untreated, very hard, and strong hardwood with a long shelf life. It has a brown color with black accent stripes that changes to a deep and rich red color over time.

#### **Linax**

Linax is a linseed oil-based impregnation that provides extra long durability in outdoor environments and corresponds to impregnation class AB. The impregnated wood turns gray over time, which means that it should be re-oiled if necessary. Use a linseed-based oil for impregnated materials.

After traditional impregnation according to NTR AB, the wood is boiled in a hot linseed oil with or without color pigments under vacuum. The oil is penetrated into the surface on all six sides, which reduces moisture absorption in the wood and gives a dimensionally stable product over time. The result is a dried product with good resistance to rot that also has long maintenance intervals. Linax-impregnated furniture is intended for outdoor environments only.

### **Assembly and placement**

#### **Freestanding**

Freestanding product that is placed directly on the ground.

#### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

### **Maintenance**

#### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

#### **Jatoba**

Jatoba basically requires no maintenance apart from regular wiping down.

### Linax impregnated pine

Outdoor furniture requires oiling every 5 years and panel products and roofs require oiling every 12 years. Maintenance should be done with linseed oil varnish. It is important that the wood is clean and dry (max. 20% moisture content) before it is finished with oil. When washing, do not use high-pressure cleaners. Washing should be done with lukewarm water and then rinsed off with a water hose at normal pressure. Strong grease-dissolving agents should not be used, but washing should be done with a mild household detergent. Detergents containing bleach should also not be used.

The oil can be applied with a roller or brush. Too much oil can cause growth on the wood and give a sticky surface. Attacks by growth can also occur if the wood has not been sufficiently dry or cleaned before the oil is applied. Growth does not damage the wood and is relatively easy to remove, but has a tendency to return.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## Designers

---

### Synnöve Mork

Synnöve Mork showcases a diverse range of creative expressions through her work in design, interior decoration, and exhibition architecture, with textiles being a prominent element. She is renowned for her graphic patterns featuring stripes and squares, which is evident in the Angle planters, her first product for Nola.

