


nola®



Cut Park Bench

Design Jonas Osslund

This striking outdoor design is eye-catching, yet understated. The bench is characterised by clean lines and precise angles that give it a contemporary character. The armrests are made from sleek steel panels complemented by the natural woodgrain visible in the seat and backrest. The armrests are designed for customization, enabling the bench to be adapted for its surroundings or to suit an architectural style. Patterns, city symbols, logos or even a coat of arms can be laser-cut into the steel. The seat and backrest are supported by steel posts that bolt to the ground, creating a stable, immovable base.

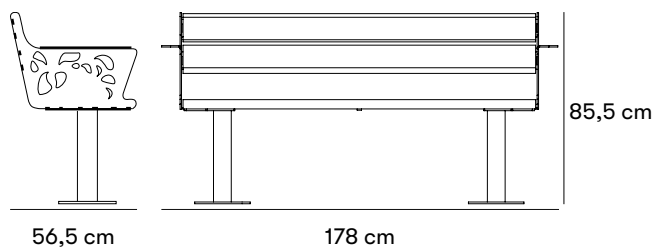

Dimensions and weight

Length: 178 cm
 Height: 85,5 cm
 Armrest height: 71 cm
 Sitting height: 47 cm
 Sitting depth: 42,5 cm
 Depth: 56,5 cm

Side end plates in 6 mm steel.

Tube stand diameter 8 cm.

Product numbers and combinations

U19-51 Cut Sofa
 U19-51BILD Initial cost for your own pattern or image in laser-cut steel
 B11-06 Initial cost for powder coating steel in a color other than standard. Choose a RAL colour.

Append to product number

WOOD AND FINISH

E for oiled oak.
 SIOO for sioo:x treatment oak.

Standard colours

■ RAL 6009
 ■ Oiled oak
 ■ SiOO:X treatment oak

Materials and surface treatments

Oak
 Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Assembly and placement

Levereras i delar för slutmontage på plats.

Maintenance

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Versions

Fastsättningsbar eller markfast stativ. Möjlighet att skapa eget mönster i soffans gavelsidor.

Designers

Jonas Osslund



Incorporating a pattern or symbol into the armrests gives the bench a uniquely individual expression.



The first model designer Jonas Osslund created for Nola revealed that the design had potential for customisation.