

nola®



High Chair & High Sofa

Design Mats Aldén

Robust, stable but still modern furniture group which consists of armchair, stool, chair, bench and sofa bed. Built on gable sides of laser cut steel sheet. The seat boards that are screwed to the stand allow the furniture group to withstand a tough environment. The shape is generous, stylish and spacious.


High / Low furniture group is approved in [Svanens Husportal](#) and is environmentally assessed via [Byggvarubedömningen](#) and [SundaHus](#).

CERTIFICATION

Produkt listad i
Svanens Husportal



SundaHus

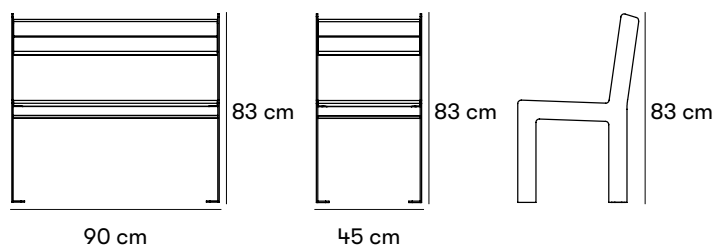

Dimensions and weight

Length: 2-sits 90 cm

Width: 1-sits 45 cm

Height: 83 cm

Sitting height: 45cm

Seat height: 45 cm. Total height: 82.9 cm. Total width: 90 cm.

Product numbers and combinations

U11-59 High Chair high-back chair

U11-59A High Chair high-back chair with armrests

U11-59/2 High Chair two-seater sofa

U11-59A/2 High Chair two-seater sofa with armrests

B11-05 Additional fee for choice of non-standard wood

B11-06 Additional fee for choice of non-standard colour

Append to product number

WOOD AND FINISH

E for oiled oak.

SiOO for sioo:x treatment oak.

METAL SURFACE FINISH

C for any color of steel, at an additional cost. Choose a RAL colour.

VARIANTS

A for armrest.

INSTALLATION TYPE

N for surface mount.

Standard colours

	RAL 3005
	RAL 6015
	RAL 9005
	RAL 9010
	Gris 2150 Sablé
	Oiled oak
	SiOO:X treatment oak

Materials and surface treatments

Oiled oak

Powder-coated steel grey

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Levereras monterad för fastsättning mot golv/mark. Bult mot mark ingår ej.

Maintenance

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Versions

1-sits och 2-sits stol, soffa. Vilbädd, möbelsystem samt loungefåtölj med fotpall.


Character

This product belongs to a contemporary furniture group consisting of chairs and back benches.

Designers

Mats Aldén

Interior and furniture designer, crafter and tutor living in Stockholm. Educated at Aarhus School of Architecture, Denmark. Has his own design studio and workshop in Stockholm since 1995. Has worked as a professor and artistic leader at Steneby HDK, as a lecturer at Konstfack University College of Arts, Crafts & Design and as a guest teacher at Beckmans Design College.

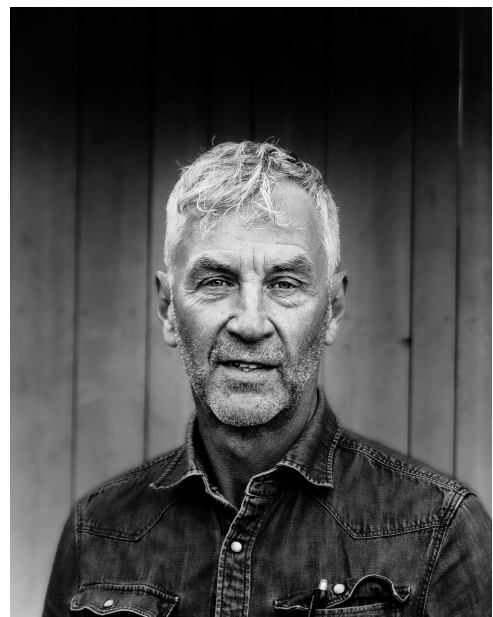



Thanks to High Chair and High Sofa, you can sit comfortably as a spectator in Västerås skatepark.