

# nola®




## Korg Swing Sofa

Design Thomas Bernstrand

In response to an increased demand for swing sofas, the popular Korg series by Thomas Bernstrand is now complemented with a much-anticipated swinging sofa as an addition to the existing collection. The swing sofa is suspended from two bars attached to a sturdy A-shaped steel frame that is bolted to the ground. The mesh in the Korg series is valuable for many open outdoor spaces, making the furniture both low-maintenance and dry, as water doesn't accumulate in ways it does on larger surfaces. The seat and frame can be ordered in different colours for an extra exciting expression.

### CERTIFICATION



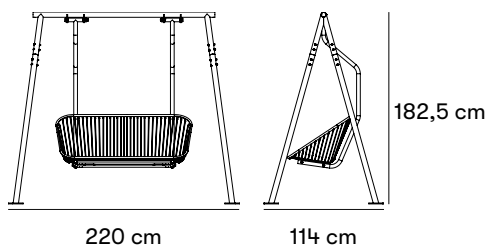

#### Dimensions and weight

##### Stand

Length: 220 cm

Width: 114 cm

Height: 182.5 cm

C-C: 206 cm x 100 cm

##### Sofa

Width: 130 cm

Depth: 61 cm

Seat height: 45 cm

Seat depth: 44 cm

Back rest: 52 cm

Total weight: 75,36 kg

##### Material dimensions

Stand: Ø 50 mm

Luminaire: Ø 35 mm

#### Product numbers and combinations

**U12-38N** Korg Swing Sofa

**B11-06** Starting costs for powder coating steel in a color other than the standard color. Choose a RAL color.

##### Append to product number

##### METAL SURFACE FINISH

When ordering, specify which of our standard colors you want:

Dark blue/Grey RAL 5008, fine texture.

Black Noir 2200 Sablé, fine texture.

Red/Orange RAL 2002 (matt clear coat), fine texture.

Green RAL 6025, fine texture.

Black RAL 9005, fine texture.

C for any color other than standard, at additional cost.

##### VARIANTS

Korg Bar stool and Korg Swing sofa is only available in a attachable option.

#### Standard colours



RAL 2002



RAL 5008



RAL 6025



RAL 9005

## Materials and surface treatments

### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## Assembly and placement

Surface mount. Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

## Maintenance

### Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## Versions

Available as a sofa, armchair, table, bench but also as a furniture system, see the page for Korg furniture systems.

## Sustainability

CO<sub>2</sub>-eq: 196,90 kg CO<sub>2</sub>

Energy consumption: 4469,89 MJ

Recycled materials: 0,92 %

[View EPD for details](#)

## Designers

---

### Thomas Bernstrand

Designer Thomas Bernstrand, who owns his own design studio in Stockholm, has participated in a large number of design and art exhibitions around the world such as MoMA in New York, Colette in Paris, Biennale Design Saint-Etienne and others.

Bernstrand has received several awards for his work, including Excellent Swedish Form and Winner of the Good Design Award 2012 for Nolastolen Share. For Nola, Bernstrand has designed a large number of products and furniture series and participated in a number of special projects over the years.

