

nola®





## Luma & Luma Titan Bench

Design Erik Österlund

Luma is an understated outdoor bench that easily blends into almost any setting. The design is very subtle, combining an efficient steel frame with the understated beauty of oak. Luma can be custom-made in a range of materials to almost any desired length. The bench can be ordered as a straight length, or with a gentle curve that creates a crescent shape. Luma can be wall-mounted and ordered with or without armrests.


### FEATURES

 Designed for accessibility

 Can be mounted on wall

### CERTIFICATION

Produkt listad i  
Svanens Husportal   **SundaHus**

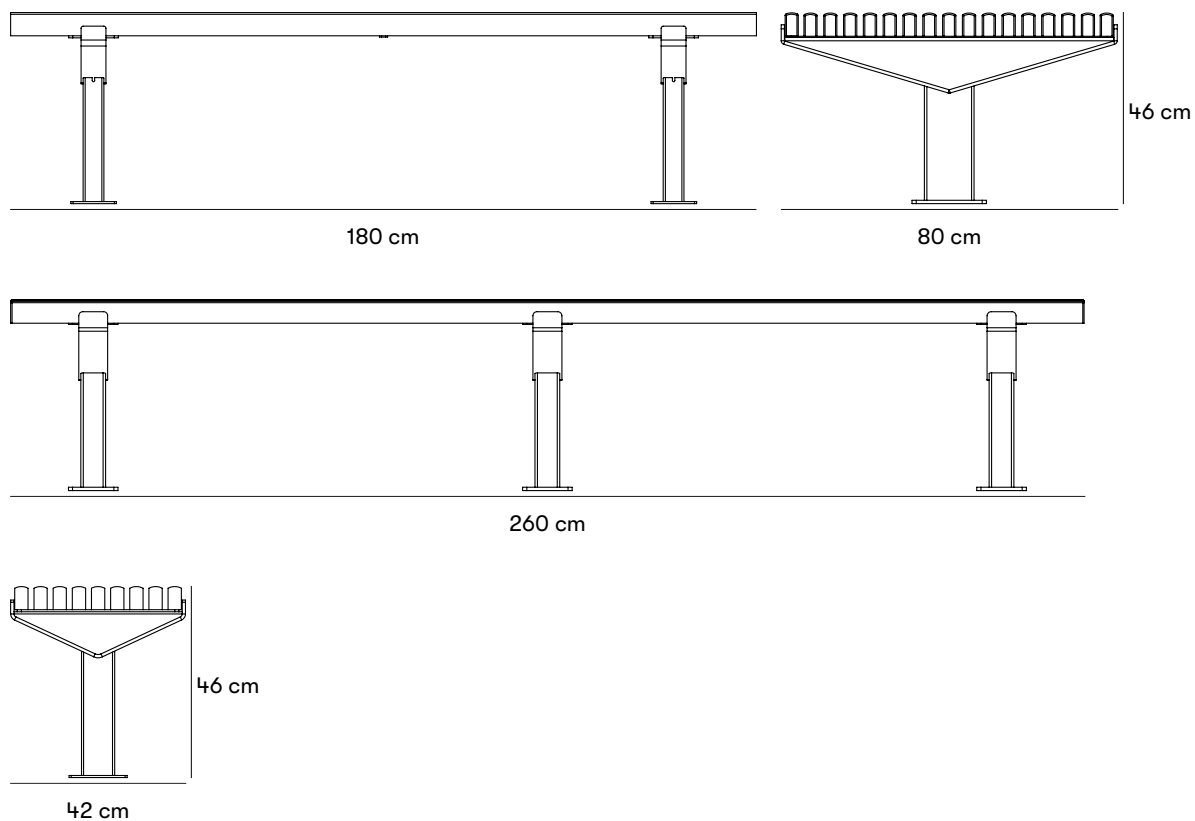

#### Dimensions and weight

##### U18-35 Luma Bench 180 cm

Height: 46 cm  
Length: 180 cm  
Width: 42 cm

##### U18-37 Luma Bench 260 cm

Height: 46 cm  
Length: 260 cm  
Width: 42 cm

##### U18-45 Luma Titan 180 cm

Height: 46 cm  
Length: 180 cm  
Width: 80 cm

##### U18-47 Luma Titan 260 cm

Height: 46 cm  
Length: 260 cm  
Width: 80 cm

260 cm bench have 3 st stands.

Armrest Luma: Width: 5 cm

Tabletop: Height over seat: 23 cm. Ø: 30 cm

#### Individual dimensions

The steel supports underneath Luma: 60 x 50 mm

The flat steel parts Luma: 60 x 8 mm

The steel supports underneath Luma Titan: 120 x 60 mm

The flat steel parts Luma Titan: 70 x 8 mm

Tabletop: Thickness: 6 mm

#### Product numbers and combinations

U18-35	Luma bench length 180 cm
U18-37	Luma bench length 260 cm
U18-39	Luma bench, custom-made length to a maximum of 260 cm
U18-35-ARM	Luma bench armrest
U18-45	Luma Titan bench length 180 cm
U18-47	Luma Titan bench length 260 cm
U18-35/BORD	Luma attachable tabletop 30 cm
B11-05	Additional fee for non-standard wood
B11-06	Additional fee for choosing a non-standard colour on steel

#### Append to product number

##### WOOD AND FINISH

E for oiled oak.

##### METAL SURFACE FINISH

C for any choice of non-standard colour, start-up cost is added.

##### VARIANTS

Angled benches are cut on request. The sections are joined by steel brackets. They can be ordered in custom lengths to a maximum of 260 cm. Versions longer than 260 cm can be created using several sections.

##### INSTALLATION TYPE

M for in-ground.

N for surface mount.

V for mounted to wall.

MUR for mounted on wall.

#### Standard colours



RAL 7011

Oiled oak

#### Materials and surface treatments

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

##### Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

### **Wood oil**

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

## **Assembly and placement**

### **Freestanding**

Freestanding product that is placed directly on the ground.

### **In-ground**

Cast in ground.

### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

### **Mounted on wall**

Frames are attached to concrete or stone walls with expanders or chemical anchors. Seat sections mounted on top of walls are attached to the frames.

Fasteners for mounting on top of walls not included.

### **Mounted to wall**

Bolted in place to stand/wall bracket.

Bolts for walls not included.

Fully assembled.

## **Maintenance**

Glans 40. Pulverlack går att beställa på sprayflaska.

### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

### **Oiled oak**

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## **Versions**

Straight or radius. Standard 180 or 260 cm long. 42 or 80 cm wide. Also Available as a backed bench with or without armrests. Luma can also be wall mounted.

#### Character

A discreet outdoor bench that easily blends into almost any setting.

#### Sustainability

[View EPD for details](#)

#### Designers

---

Erik  
Österlund



