


nola®



## Näckros Planter and Water Basin

Design Jan Ostwald

The water lily provided the inspiration for this elegant design crafted in cast bronze. The water lily's beauty has led to their widespread use as ornamental plants, and now their rounded petals can be seen in the form of this basin made to contain plants or create a water feature. Whether placed on the ground or positioned on a plinth, the beautiful shape of this design will enhance any outdoor area.

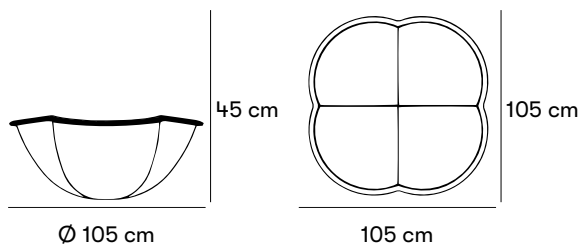

#### Dimensions and weight

Height: 45 cm

Ø: 105 cm

Weight 75 kg

Volume: 170 L.

#### Individual dimensions

The basin has a depth of appr 6 mm - 7 mm. The basin's edge is appr 16.5 mm thick.

Planting insert in 5 mm green, fiberglass-reinforced plastic.

The insert is equipped with 4 folding lifting eyes.

#### Product numbers and combinations

##### Ö13-41

Ö13-42 Näckros brown patinated waxed bronze

Ö13-43 Näckros black-grey patinated waxed bronze

Ö13-45 Planter pot with lifting loops

Ö13-45BT16 Mona water tank, 16 liters

Ö13-41A Näckros in casted aluminium

Ö13-41AP Näckros in cast powder-coated aluminium

#### Append to product number

##### METAL SURFACE FINISH

Gris 2900 Sablé for grey powder coated aluminium

Noir 2200 Sablé for black powder coated aluminium

##### INSTALLATION TYPE

M for installation in pre-cast foundations.

#### Standard colours

 Gris 2900 Sablé

 Noir 2200 Sablé

#### Materials and surface treatments

##### Recycled sand cast aluminium

Aluminium recycled from scrap, hand cast in sand moulds. The energy consumption when producing recycled aluminium is about 5% of that used when producing virgin aluminium.

### **Plastic / Fiberglass**

Glass fiber is often used as reinforcement in plastics to increase rigidity by coating a glass fiber fabric with a plastic, usually a polyester, which hardens and binds the glass fiber together.

### **Bronze**

Bronze is an alloy of copper and tin. The material is extremely weather-resistant.

## **Assembly and placement**

### **Freestanding**

Freestanding product that is placed directly on the ground.

### **Installation in pre-cast foundations**

Posts for installation in pre-cast foundations.

The water feature version requires some assembly.

The water basin version has four countersunk holes drilled in square formation which require four sunken stainless steel M10 bolts. The centre-to-centre distance is 185 mm.

## **Maintenance**

### **Sand cast aluminium**

Maintenance on aluminium is not normally needed, but make sure to wash and keep the material clean. Untreated aluminium develops a matte surface over time.

### **Cast bronze**

Should a product crack or break through vandalism, it works perfectly to solder or weld the material. A damaged oxide layer can be restored through patination by a skilled craftsman.

**[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)**

## **Character**

Näckros can be placed directly on the ground or positioned atop a plinth. Its beautiful shape will enhance any outdoor area.

## **Designers**

---

**Jan  
Ostwald**



