

nola®



Ribb Park Bench


Design Tom Stepp


Steel runners create the legs for the Ribb park bench, giving it potential to be completely freestanding. The steel runners arc upwards from the ground to form the armrests and create the backrest. With the legs, armrests and backrest formed from single lengths of steel, Ribb has extra stability, making it a good choice for applications where freestanding seating is required. Ribb is a popular choice for shopping centres, transport hubs, sidewalks and leisure areas.

CERTIFICATION

Produkt listad i
Svanens Husportal  BYGGVARU
BESKRIVNINGEN

FEATURES

 Designed for accessibility

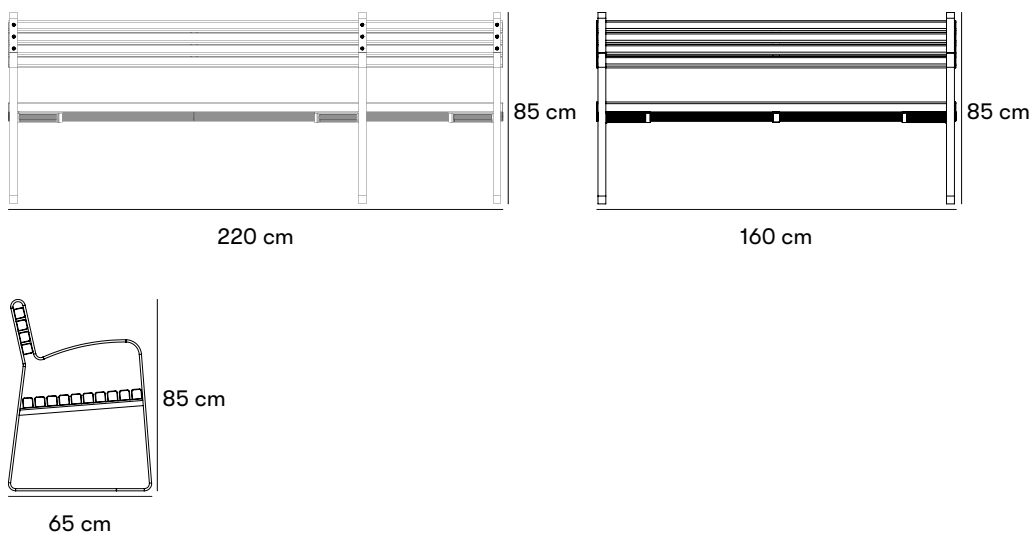

Dimensions and weight

Length: 160 / 220 cm

Width: 65 cm

Height: 85 cm

Sitting height: 46 cm

Weight 48 kg

Individual dimensions

The steel lengths in the frame: 35 mm x 10 mm

Wood components: 45 mm x 45 mm

Product numbers and combinations

U18-80 Ribb, backed bench

B11-06 Startup cost for powder coating steel in a color other than standard.

Choose a RAL colour.

Append to product number

WOOD AND FINISH

MH for oiled mahogany.

E for oiled oak.

METAL SURFACE FINISH

VFZ for stands in hot-dip galvanized steel.

P for powder-coated stand, enter RAL color (undertreatment electro-galvanized stand).

C for any color other than standard, starting cost is added.


VARIANTS

If you want a more accessible model with 3 armrests, contact us at Nola. It would also be good to have the stand in a lacquered version.

INSTALLATION TYPE

N for surface mount.

Standard colours



Materials and surface treatments

Mahogany - FSC-certified

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Hot-dip galvanized or electrogalvanized and powder coating

Available in either only hot-dip galvanized steel or electro-galvanized and powder-coated steel.

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Electrogalvanizing provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current. Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Delivered completely assembled.

Maintenance

Glans 40. Pulverlack går att beställa på sprayflaska.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

Hot dip galvanized steel

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

Oiled mahogany

Oiled mahogany should be oiled two times a year.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Available in other lengths than standard and with extra armrests. If you want the stands painted, they can be galvanized and powder coated in the desired RAL.

Designers

Tom Stepp

