

# nola<sup>®</sup>




## Sirius Planter

Design Bernt Fröderberg

Sirius spaljë ingår i System Utblick som är ett flexibelt system i stål och trä för kombination av spaljëer, stolpar och pergolatak. Spaljéerna och stolparna i Sirius är tillverkade i lackerat stål. Spaljéerna kan förses med en kvadratperforerad plåt, tilläggsbeteckning T, som ger en 40% vindgenomsläpplighet för bästa vindreduktion.

CERTIFICATION



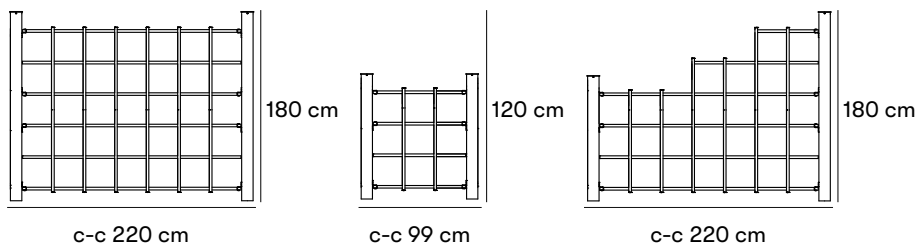

## Dimensions and weight

### Sirius Trellis

Length: C-C 99 cm och C-C 220 cm

Trellis: 98 cm/ 129 cm/ 159 cm ascending right or left

Straight: Height: 98 cm och 159 cm

Post height: 120 cm och 180 cm (above ground)

### Individual dimensions

Posts: 108 x 3.6 mm

Trellis: 25 x 3 mm

Perforated sheet: Thickness 2 mm

## Product numbers and combinations

Ö70-01 Sirius post 120 cm

Ö70-02 Sirius post 180 cm

Ö70-10 Sirius trellis, length c-c 220 cm, height 98 cm

Ö70-11 Sirius trellis, length c-c 220 cm, height 159 cm

Ö70-12H Sirius trellis, length c-c 220 cm, height 98/129/159 cm, staggered trellis right

Ö70-12V Sirius trellis, length c-c 220 cm, height 98/129/159 cm, staggered trellis left

Ö70-13 Sirius trellis, length c-c 99 cm, height 159 cm

Ö70-14 Sirius trellis, length c-c 99 cm, height 98 cm

B11-06 Startup cost for powder coating steel in a color other than standard.

Choose a RAL colour.

### Append to product number

#### METAL SURFACE FINISH

S for black RAL 9005.

A for anthracite Pig 2900 Sablé.

G for dark green RAL 6012.

C for steel any colour, start-up costs are added.

#### INSTALLATION TYPE

M for in-ground.

## Standard colours

■ RAL 9005

■ RAL 6012

■ Gris 2900 Sablé

## Materials and surface treatments

### **Steel**

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

## **Assembly and placement**

### **In-ground**

Cast in ground.

Posts for trellis are drilled and threaded on site. Trellis is delivered in finished units. Note: that the trellis has an "outside" and an "inside". The standing pipes must be facing outwards. That the specified c-c dimensions are center dimensions between posts. Height measure is the height measure on the trellis. Overall dimensions above ground are height measurements + 12 cm.

Posts cast 70 cm in the ground. Based on non-frost-repellent material to frost-free depth.

## **Maintenance**

### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## **Versions**

Standard colors on steel are black, anthracite or dark green.

The trellis can be provided with a square perforated plate.

## **Character**

Trellis that is part of the system Outlook. A varied system with many possibilities.

## Designers

---

Bernt Fröderberg

