


Ö04-00N      Ö04-00PN      Ö04-01N

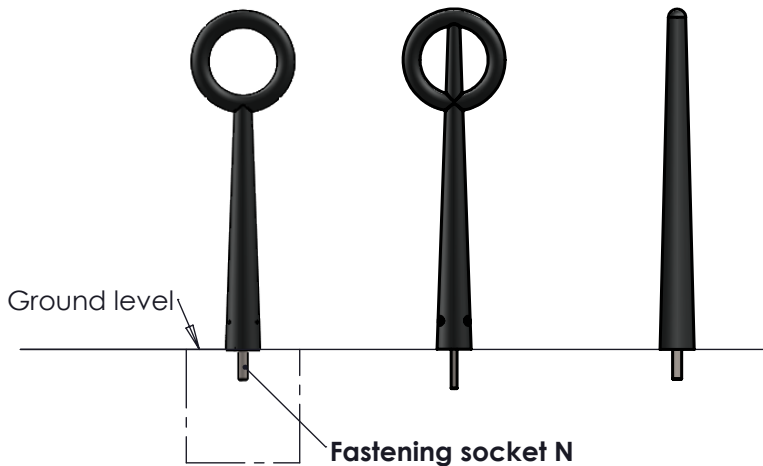

Fastening socket N

Installed with chemical anchor in concrete foundation or equivalent underlay.

Dimensions of anchor/thread rod:  
 M16 + nut and washer,  
 alternatively expander bolt M16 +  
 screw M6M x 120mm.

The Hoop bollard is available in two variants of fastening socket. Model N and M

**Fastening socket N** is installed at ground level with an M16 chemical anchor or expander bolt.


Tightening torque M1 - 200 Nm

**Fastening socket model M** is cast into a cast in place foundation. Excavate to first free depth if possible, install a base of drainage material and cast pipe in a foundation of approximately Ø300mm.

Alternatively install prefabricated foundation "MEAG". Saferoad Art.nr. 600500.

**IMPORTANT** is that the fastening socket's upper edge is 100 mm above ground level.

Ö04-00M      Ö04-00PM      Ö04-01M

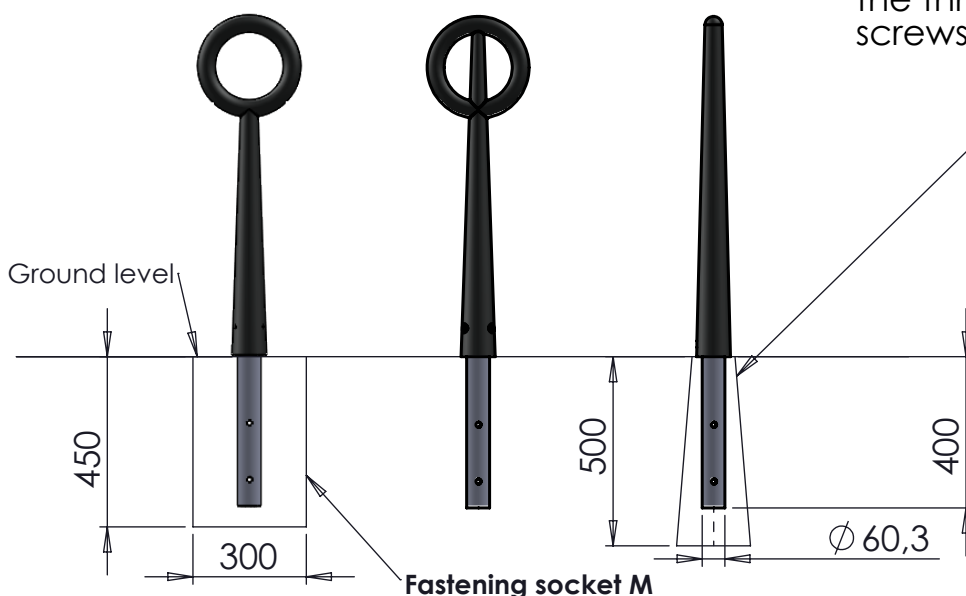

Fastening socket M

In place cast foundation.  
 Cast in paper tube,  
 alternatively plastic pipe.

Hoop is subsequently installed using the three included countersunk M10 screws.

Fastening socket M

Alternative installation with prefabricated foundation "MEAG".

Saferoad Art.nr. 600500.

# HOOP sid 2/2



Headoffice: Nola Industrier AB Repslagargatan 15b Box 17701  
S-118 93 Stockholm T:+46(0)8 702 19 60 F:+46(0)8 702 19 62  
E:headoffice@nola.se Sales/showroom: Skeppsbron 3  
S-211 20 Malmö T:+46(0)40 17 11 90 Orderfax:+46(0)40 12 75 45

[www.nola.se](http://www.nola.se)

